

DD000384

DD000384
RS-SLM-324C

Seal

- Slide window **A** to left. Push **T** toggle switch to ON.
- Slide window **A** to right. Insert **C** cable header to engage. Then pull **S** square bolt.
- Insert **H** bolt & seal with **B** barrel. Then insert **C** cable tip to locking chamber & pull right.

Unseal

- Cut **H** bolt.
- Remove **H** bolt. Push **S** square bolt. Remove **C** cable tip & header.
- Slide window **A** to left. Push **T** toggle switch to OFF.

ENVOTECH

Open top sliding panel



Confirm power switch is "OFF"



Plug device charger into outlet





Align charger with device pins



Charge for 6 Hours or until **Green**

Do not unplug while
Indicator is **RED**

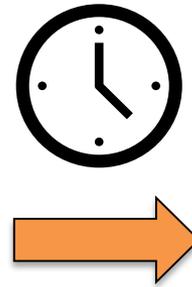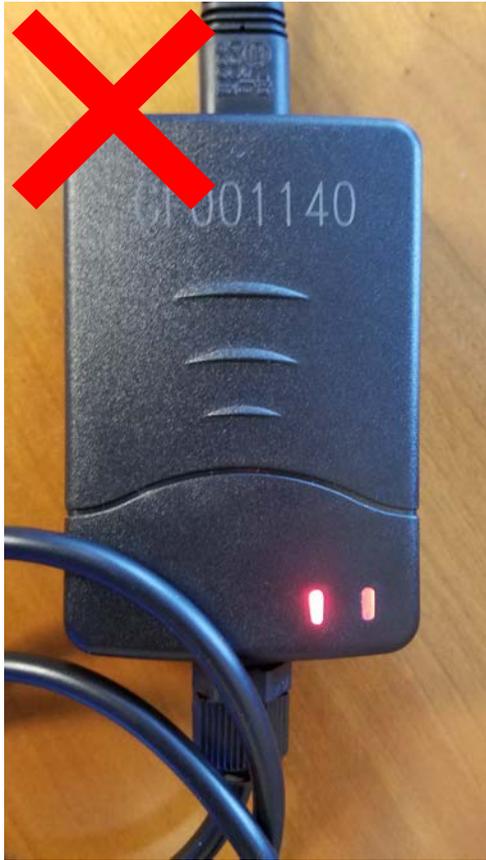



AKUA
SECURE LOGISTICS